


# Technical data sheet

## Cable tray for conveyor technology 60 FS

Item number: 6061851

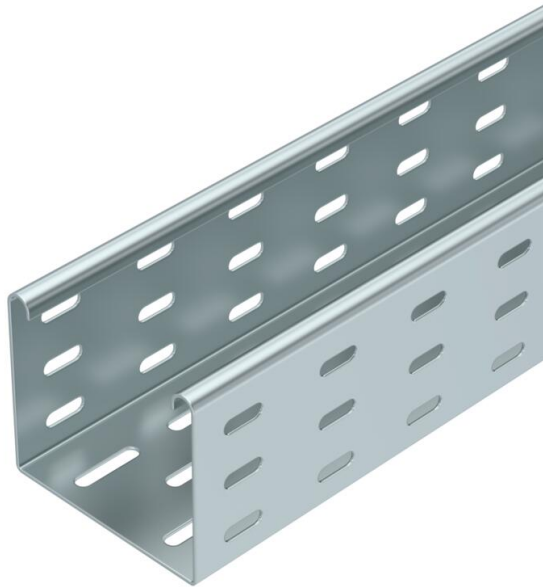

Perforated cable tray for the routing of cables, especially suited for material handling technology in the automotive industry. Can be used in indoor areas. Screw connection. Suitable for direct and elevated floor mounting.



|           |                  |
|-----------|------------------|
| <b>St</b> | Steel            |
| <b>FS</b> | Strip galvanized |

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 6061851                  |
| Type                               | BKRS F 810 FS            |
| Description 1                      | Cable Tray               |
| Description 2                      | for conveyor technology  |
| Manufacturer                       | OBO                      |
| Dimension                          | 85x100x3000              |
| Colour                             | zinc                     |
| Material                           | Steel                    |
| Surface                            | Strip galvanized         |
| Surface standard                   | DIN EN 10346             |
| Smallest sales unit                | 3                        |
| Unit of quantity                   | Metre                    |
| Weight                             | 310.867 kg               |
| Weight unit                        | kg/100 m                 |
| CO2 Footprint (GWP) Cradle-to-Gate | 7,7711 kg CO2e / 1 Meter |


# Technical data sheet

## Cable tray for conveyor technology 60 FS

Item number: 6061851



### Dimensions



|                 |          |
|-----------------|----------|
| Dimension       | 85x100   |
| Length          | 3,000 mm |
| Width           | 100 mm   |
| Height          | 85 mm    |
| Plate thickness | 1.5 mm   |
| Dimension B     | 100 mm   |
| Dimension H     | 85 mm    |

### Technical data

|   |                      |
|---|----------------------|
| Connector version                       | Without connectors   |
| Maintain electrical functions           | no                   |
| With cover                              | no                   |
| Mounting perforation in base            | yes                  |
| NATO hole pattern                       | no                   |
| Usable cross-section                    | 83 cm <sup>2</sup>   |
| Usable cross-section                    | 8300 mm <sup>2</sup> |
| Rustproof steel, pickled                | no                   |
| Side perforation                        | no                   |
| Wide-span version                       | no                   |
| Usable length                           | 3000 mm              |
| Type of connector, cable support system | Screwed              |