#### **Technical data sheet**

#### Data technology support, 1 module, straight outlet, type C



**Item number: 6119218** 



Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

the data connection modules in the mounting opening.

The type C data technology support is suitable for accepting the following data connection modules: BTR (Keystone design): Cat. 6A module and UAE module; Corning: modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat. 6A; Fixlink Keystone Cat. 6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 Keystone socket modules; OBO: Type ASM-C6A and ASM-C6A G; R&M: Cat. 6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

For installation in Rapid 45 and Rapid 80 device installation trunking, ISS service poles and underfloor systems.

PC

Polycarbonate

#### Master data


Item number	6119218	
Туре	DTG-2C AL1	
Description 1	Data technology support	
Description 2	f. 2 connection modules type C	
Manufacturer	OBO	
Dimension	45x45mm	
Colour	Aluminium painted	
Material	Polycarbonate	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	1.1 kg	
Weight unit	kg/100 pc.	
Colour Material Smallest sales unit Unit of quantity Weight	Aluminium painted Polycarbonate 1 Piece 1.1 kg	

### **Technical data sheet**

Data technology support, 1 module, straight outlet, type C



**Item number: 6119218** 

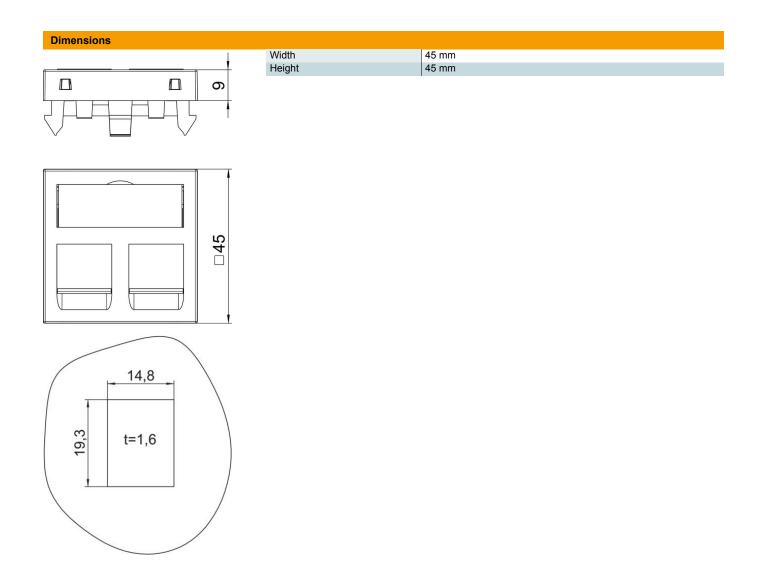

# **Technical data sheet**

# Data technology support, 1 module, straight outlet, type C



**Item number: 6119218** 

Technical data		
	Surface version	Matt
	Fastening type	Lock
	Labelling panel	With labelling panel
	Halogen-free	yes
	Hinged cover	no
	Lamp-wire connector	no
	With printed label	no
	With dust protection	yes
	Mounting opening	Type C
	Protection rating	IP20
	Depth	9 mm
	Support ring	no
	Transparent	no
	Use	Installable data connector
	Strain relief option	no
	Combination	Basic element with central cover plate