


Technical data sheet

Roof conductor holder for tiled, slated and corrugated roofs, Rd 8–10

Item no. 5216818

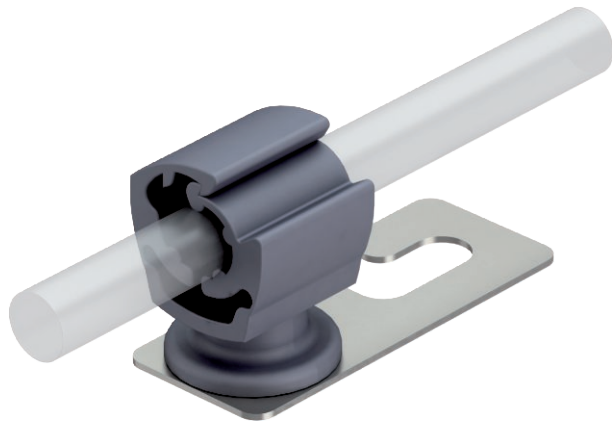


- Bottom section stainless steel (V2A)
- Bottom section with Ø 8.5 mm slot
- Conductor holder of polyamide

VA Stainless steel, rustproof 1.4301

Master data

Item no.	5216818
Type	159 K-VA
Description 1	Roof conductor holder
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Smallest sales unit (VG)	20 Piece
Weight	2,54 kg/100 pc.

Technical data

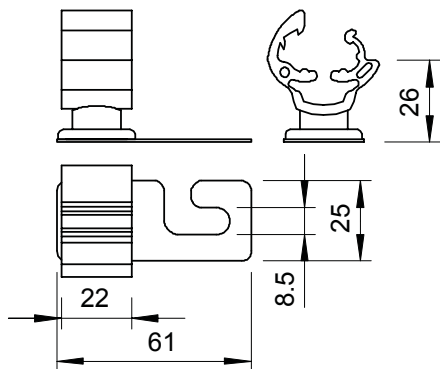

Application	Corrugated roof
Conductor fastening type	With clamp clip
Cable diameter from/to	8,00 - 10,00
Mounting type	Screw-on
Mounting height	21,00 mm
Fit	Rd 8-10 mm
Material of the holder	Plastic
Material of the support	Rustproof steel (V2A)