


# Technical data sheet

## DIN cross-connector for flat conductor

Item no. 5314658

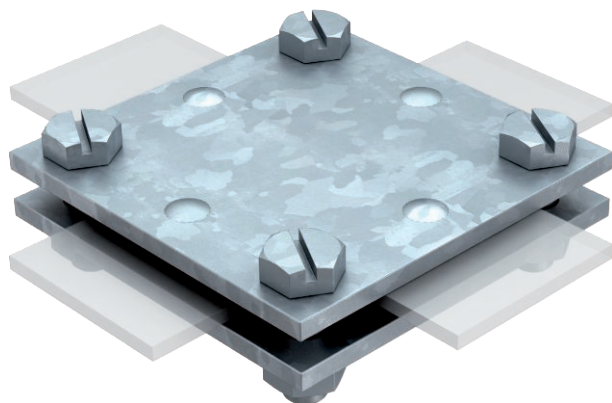

- Meets the requirements of VDE 0185-305-3 (IEC/ EN 62305-3)
- Fit: Max. FL 30 x FL 30 or max. FL 40 x FL 40
- Without adapter plate
- Mounted with 4 hexagonal bolts M8 x 25 and 4 hexagonal nuts M8 (F)




- St** Steel
- FT** Hot-dip galvanised

### Product description

### Master data

Item no.	5314658
Type	256 A-DIN 30 FT
Description 1	Cross-connectors
Description 2	no separator plate
Dimension	30mm
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Weight	27,80 kg/100 pc.

### Technical data



Dimension A	60,00 mm
Dimension B	60,00 mm
Type of fastening screw	Hex set screw
Type of connector	Cross-connectors
Lightning current carrying capacity	H/100 kA
Suitable for connection	Flat conductor FI 30 / FI 30
Fit	max. FL30 mm