
Technical data sheet

Push-fit anchor with loop fastening

Item number: 2351679

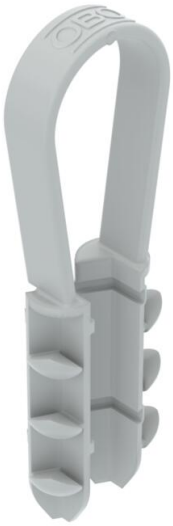

Push-fit anchor for mounting light loads in the electrical installation. Suitable for concrete, calcareous limestone, full brick, hollow brick. Toolless mounting by pushing into a drill hole in a wall or on a ceiling. Without screws. With reclosable loop for fastening cables.

HALOGEN FREE Ø6

PA Polyamide

Master data


Item number	2351679
Type	DP S 30
Description 1	Push-fit plug
Description 2	with loop fastening
Available from	01.01.2026
Manufacturer	OBO
Dimension	41,0x14,0x7,5
Material	Polyamide
Smallest sales unit	100
Unit of quantity	Piece
Weight	0.063 kg
Weight unit	kg/100 pc.

Technical data sheet

Push-fit anchor with loop fastening

Item number: 2351679

Dimensions



Length	30 mm

Technical data

Version for	Push-fit anchor
Drill hole depth	35 mm
Drill hole diameter, max.	6 mm
Drill hole diameter, min.	6 mm
Suitable for fastening with cable ties	no
Suitable for gas concrete	yes
Suitable for hexagonal wood screw	no
Halogen-free	yes
With edge	no
With bolts	no
Mounting temperature, max.	60 °C
Min. mounting temperature	5 °C
ROHS-conformant	yes
Temperature-resistance, max.	60 °C
Temperature resistance, min.	-20 °C
Suitable for material	Calcareous sandstone Porous concrete Concrete Gas concrete Full brick Hollow brick
Mounting type, anchor, tie	Pre-mounting

Loads

Safe working load concrete	175 N
Safe working load vertically perforated brick	130 N
Breaking load concrete	400 N
Breaking load vertically perforated brick	300 N